



ENERG

енергия · ενεργεια



100547LUX02


alpha innotec

LW 310A-LUX2.0



55 °C

35 °C

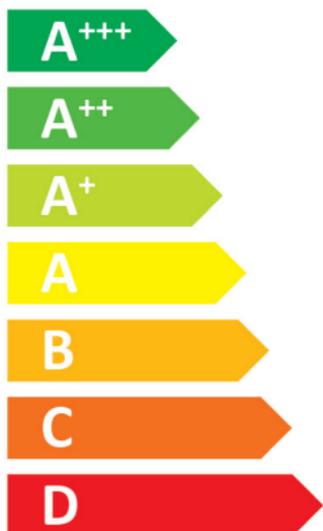

A+

A++



- dB



64 dB

■ 28
■ **27**
■ 30
kW

■ 30
■ **28**
■ 31
kW





ENERGY

100547LUX02

alpha innotec

LW 310A-LUX2.0



55 °C

35 °C



A⁺

A⁺⁺



- dB



64 dB

■ 28
■ **27**
■ 30
kW

■ 30
■ **28**
■ 31
kW





ENERG

енергия · ενεργεια

Y

IJA


IE

IA


100547LUX02

alpha innotec

LW 310A-LUX2.0 + Luxtronik 2.0





+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>

package (heat pumps and combination heater with heat pump) - LW 310A-LUX2.0 + Luxtronik 2.0

Seasonal space heating energy efficiency of heat pump (η_s)

① 122 %

Rated heat output of the heat pump (P_{rated} kW)

27

Temperature control

Class

III (Table 1)

+

② 1,5 %

Supplementary boiler

package with hot water storage tank

no

P_{sup} kW (rated heat output of supplementary heater)

η_s % (σ_{π})

$(\eta_s \% (sup) - ①) \times (\alpha_{WP}) = -$ ③ %

(α_{WE} : see Table 3)

(α_{WE})

solar contribution

(A_{Koll} m²)

(η_{Koll} %)

(V_{Sp} m³)

(standstill heat loss of the hot water storage tank in W)

(η_{Sp} : Table 2)


$((294/P_{rated} \times 11) \times (A_{Koll} \text{ m}^2) + (115/P_{rated} \times 11) \times (V_{Sp} \text{ m}^3)) \times 0,45 \times ((\eta_{Koll} \%)/100) \times (\eta_{Sp}) = +$ ④ %

Seasonal space heating energy efficiency of package

⑤ 123 %

rounded to the nearest integer

Seasonal space heating energy efficiency class of package

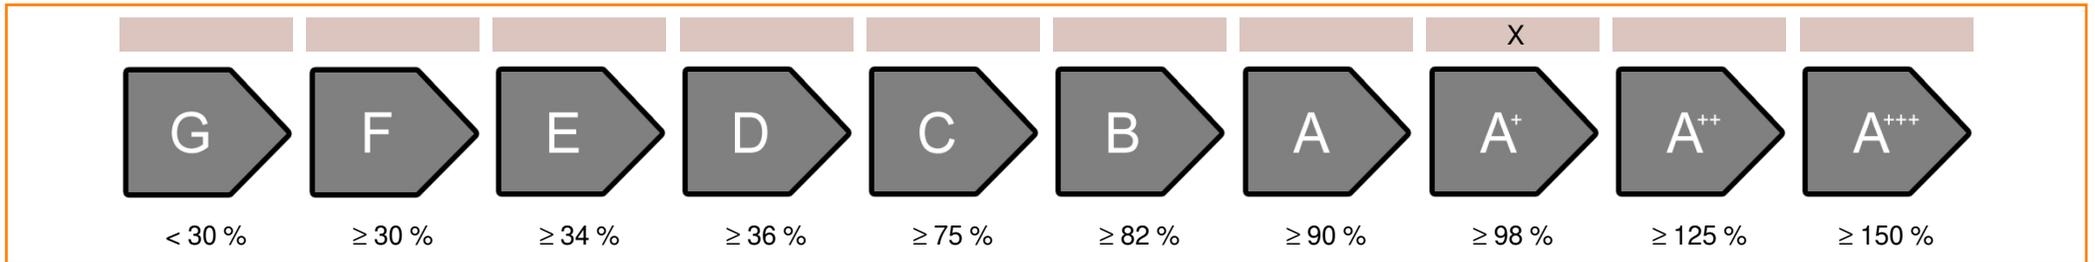

Seasonal space heating energy efficiency under colder or warmer climate conditions

Seasonal space heating energy efficiency of the heat pump (η_s) under colder climate conditions

107 %

Seasonal space heating energy efficiency of the heat pump (η_s) under warmer climate conditions

145 %

colder ⑤ 123 -V 14 = 109 warmer ⑤ 123 +VI 23 = 146

heatpump datasheet:			
manufacturer:	alpha innotec		
model:	LW 310A-LUX2.0		
Information concerning energy efficiency class and rated heat output:			
	average / low	average / medium	
energy efficiency class space heater:	A++	A+	-
rated heat output:	28	27	kW
energy efficiency space heater:	151	122	%
annual final energy consumption space heater	15151	17816	kWh
sound power level indoors		-	dB
special precautions concerning assembly, installation or maintenance			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
additional information	low	medium	
rated heat output colder climate	30	28	kW
rated heat output warmer climate	31	30	kW
energy efficiency space heater colder climate	131	107	%
energy efficiency space heater warmer climate	186	145	%
annual energy consumption space heater colder climate	21723	25057	kWh
annual energy consumption space heater warmer climate	8750	10714	kWh
sound power level outdoors		64	dB

technical data of the temperature controller		
manufacturer:	alpha innotec	
model:	Luxtronik 2.0	
controller class	III	-
contribution of the controller to the energy efficiency space heater	1,5	%

Model				LW 310A-LUX2.0			
Air-to-water heat pump: (yes/no)				yes			
Brine-to-water heat pump: (yes/no)				no			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				medium			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	27	kW	Seasonal space heating energy efficiency	η_S	121,6	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	23,8	kW	Tj = -7°C	COPd	2,03	-
Tj = +2°C	Pdh	30,5	kW	Tj = +2°C	COPd	3,02	-
Tj = +7°C	Pdh	19,1	kW	Tj = +7°C	COPd	4,05	-
Tj = +12°C	Pdh	21,1	kW	Tj = +12°C	COPd	4,92	-
Tj = bivalent temperature	Pdh	23,8	kW	Tj = bivalent temperature	COPd	2,03	-
Tj = operation limit temperature	Pdh	21,5	kW	Tj = operation limit temperature	COPd	1,76	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	58	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,010	kW	Rated heat output	P _{sup}	5,4	kW
Thermostat-off mode	P _{TO}	0,010	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,010	kW				
Crankcase heater mode	P _{CK}	-	kW				
Other items							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	6.000	m ³ /h
sound power level, indoors/outdoors	L _{WA}	- / 64	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Model				LW 310A-LUX2.0			
Air-to-water heat pump: (yes/no)				yes			
Brine-to-water heat pump: (yes/no)				no			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				low			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	28	kW	Seasonal space heating energy efficiency	η_S	151,2	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	25,0	kW	Tj = -7°C	COPd	2,92	-
Tj = +2°C	Pdh	31,1	kW	Tj = +2°C	COPd	3,67	-
Tj = +7°C	Pdh	19,4	kW	Tj = +7°C	COPd	4,86	-
Tj = +12°C	Pdh	21,2	kW	Tj = +12°C	COPd	5,26	-
Tj = bivalent temperature	Pdh	25,0	kW	Tj = bivalent temperature	COPd	2,92	-
Tj = operation limit temperature	Pdh	22,9	kW	Tj = operation limit temperature	COPd	2,63	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	58	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,010	kW	Rated heat output	P _{sup}	5,4	kW
Thermostat-off mode	P _{TO}	0,010	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,010	kW				
Crankcase heater mode	P _{CK}	-	kW				
Other items							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	6.000	m ³ /h
sound power level, indoors/outdoors	L _{WA}	- / 64	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							