



ENERG

енергия · ενεργεια



10348141


NOVELAN

WIC 10HXE



55 °C

35 °C

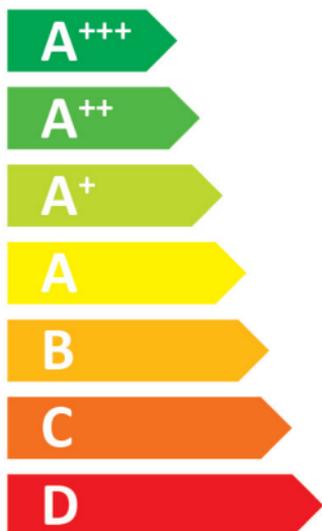

53 dB



- dB

■ 10
■ **10**
■ 10
kW

■ 11
■ **11**
■ 11
kW





ENERGY

10348141

NOVELAN

WIC 10HXE



55 °C

35 °C



53 dB



- dB

■ 10
■ **10**
■ 10
kW

■ 11
■ **11**
■ 11
kW





ENERG

енергия · ενεργεια

Y

IJA


IE

IA

10348141

NOVELAN

WIC 10HXE + WPR-Net 2.0



A+++

A+++

A+++

A++

A+

A

B

C


D

E

F

G

+



+



+



+



package (heat pumps and combination heater with heat pump) - WIC 10HXE + WPR-Net 2.0

Seasonal space heating energy efficiency of heat pump (η_s) ① 174 %

Rated heat output of the heat pump (P_{rated} kW) 10

Temperature control Class III (Table 1) + ② 1,5 %

Supplementary boiler
package with hot water storage tank no P_{sup} kW (rated heat output of supplementary heater)

η_s % (σ_{π}) $(\eta_s \% (sup) - ①) \times (\alpha_{WP}) = -$ ③

(α_{WE} : see Table 3) (α_{WE})


solar contribution $(A_{Koll} m^2)$ $(\eta_{Koll} \%)$
 $(V_{Sp} m^3)$ $(standstill\ heat\ loss\ of\ the\ hot\ water\ storage\ tank\ in\ W)$
 $(\eta_{Sp}: Table\ 2)$

$((294/P_{rated} \times 11) \times (A_{Koll} m^2) + (115/P_{rated} \times 11) \times (V_{Sp} m^3)) \times 0,45 \times ((\eta_{Koll} \%) / 100) \times (\eta_{Sp}) = +$ ④

Seasonal space heating energy efficiency of package ⑤ 176 %

rounded to the nearest integer

Seasonal space heating energy efficiency class of package

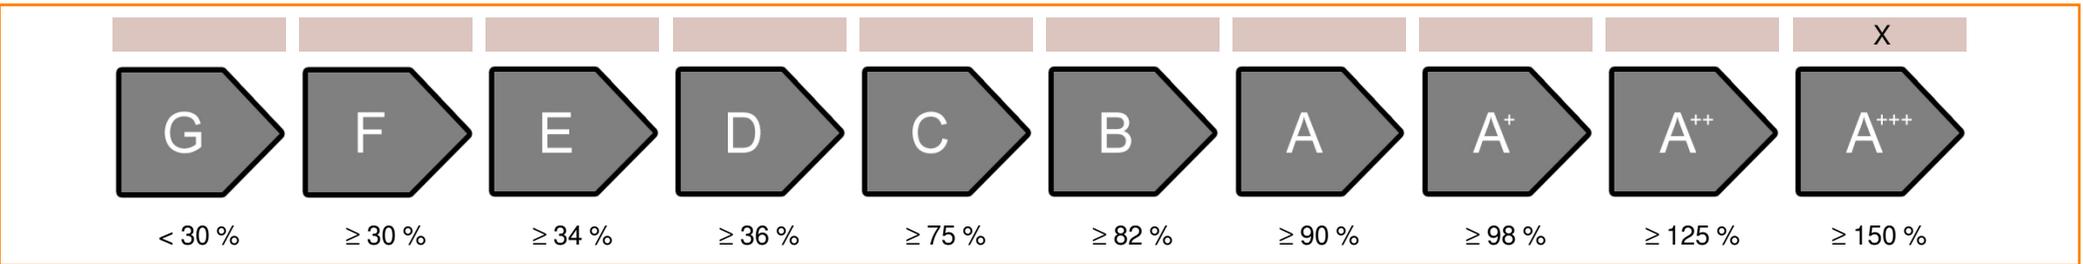

Seasonal space heating energy efficiency under colder or warmer climate conditions

Seasonal space heating energy efficiency of the heat pump (η_s) under colder climate conditions 182 %

Seasonal space heating energy efficiency of the heat pump (η_s) under warmer climate conditions 176 %

colder ⑤ 176 -V -7 = 183 warmer ⑤ 176 +VI 1 = 177

heatpump datasheet:			
manufacturer:	NOVELAN		
model:	WIC 10HXE		
Information concerning energy efficiency class and rated heat output:			
	average / low	average / medium	
energy efficiency class space heater:	A+++	A+++	-
rated heat output:	11	10	kW
energy efficiency space heater:	232	174	%
annual final energy consumption space heater	3796	4499	kWh
sound power level indoors		53	dB
special precautions concerning assembly, installation or maintenance			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
additional information	low	medium	
rated heat output colder climate	11	10	kW
rated heat output warmer climate	11	10	kW
energy efficiency space heater colder climate	239	182	%
energy efficiency space heater warmer climate	233	176	%
annual energy consumption space heater colder climate	4389	5165	kWh
annual energy consumption space heater warmer climate	2443	2887	kWh
sound power level outdoors		-	dB

technical data of the temperature controller		
manufacturer:	NOVELAN	
model:	WPR-Net 2.0	
controller class	III	-
contribution of the controller to the energy efficiency space heater	1,5	%

Model				WIC 10HXE			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				no			
Water-to-water heat pump: (yes/no)				yes			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				medium			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	10	kW	Seasonal space heating energy efficiency	η_S	174,4	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	10,1	kW	Tj = -7°C	COPd	3,52	-
Tj = +2°C	Pdh	10,6	kW	Tj = +2°C	COPd	4,51	-
Tj = +7°C	Pdh	11,0	kW	Tj = +7°C	COPd	5,33	-
Tj = +12°C	Pdh	11,3	kW	Tj = +12°C	COPd	6,32	-
Tj = bivalent temperature	Pdh	9,9	kW	Tj = bivalent temperature	COPd	3,29	-
Tj = operation limit temperature	Pdh	9,9	kW	Tj = operation limit temperature	COPd	3,29	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	65	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,010	kW	Rated heat output	P _{sup}	-	kW
Thermostat-off mode	P _{TO}	0,010	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,010	kW				
Crankcase heater mode	P _{CK}	-	kW				
Other items							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m ³ /h
sound power level, indoors/outdoors	L _{WA}	53 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Model				WIC 10HXE			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				no			
Water-to-water heat pump: (yes/no)				yes			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				no			
application: (low/medium)				low			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	11	kW	Seasonal space heating energy efficiency	η_S	231,5	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	11,0	kW	Tj = -7°C	COPd	5,62	-
Tj = +2°C	Pdh	11,1	kW	Tj = +2°C	COPd	6,01	-
Tj = +7°C	Pdh	11,3	kW	Tj = +7°C	COPd	6,39	-
Tj = +12°C	Pdh	11,4	kW	Tj = +12°C	COPd	6,70	-
Tj = bivalent temperature	Pdh	11,0	kW	Tj = bivalent temperature	COPd	5,56	-
Tj = operation limit temperature	Pdh	11,0	kW	Tj = operation limit temperature	COPd	5,56	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-10	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	65	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,010	kW	Rated heat output	P _{sup}	-	kW
Thermostat-off mode	P _{TO}	0,010	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,010	kW				
Crankcase heater mode	P _{CK}	-	kW				
Other items							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m ³ /h
sound power level, indoors/outdoors	L _{WA}	53 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							